

Yaw Pitot-S

Pressure sensor for yaw pitot tube
CAN bus interface

SN: P#####


Texense sensors are designed for data logging. Should the users want to include this sensor in a closed loop system, they must undertake total responsibility from doing so.


| Static (atmospheric) pressure | | |
|--|--------------------------|-------|
| Range | 600 to 1200 | mbarA |
| Accuracy | ± 3 | mbar |
| Resolution | 0.01 | mbar |
| Sampling frequency | 200 | Hz |
| Output frequency | 1, 5, 10, 50, 100 or 200 | Hz |
| Proof pressure | 20 | BarA |
| Calibrator | Mensor CPC4000 | |
| Differential pressures | | |
| Range | -50...+50 or -76...+76 | mbar |
| Sensitive element | Piezo-resistive cells | |
| Resolution | 0.01 | mbar |
| Max offset error (from 5°C to 105°C) | ±0.15 | mbar |
| Max hysteresis and non-repeatability error (from 5°C to 105°C) | ±0.25 | mbar |
| Max non-linearity error | ±0.1 | % FS |
| Noise | At 10Hz | 3 |
| | At 200Hz | 10 |
| Sampling frequency | 200 | Hz |
| Output frequency | 1, 5, 10, 50, 100 or 200 | Hz |
| Calibrator | Mensor CPC4000 | |
| Yaw angle | | |
| Range | -40 to +40 | ° |
| Typical accuracy at 1Hz | ±2 (from -25° to +25°) | ° |
| | ±4 (from ±25° to ±40°) | ° |
| Minimum pressure required | 400 | µbar |

| | | | |
|-------------|----------------|----------|--|
| Date | | Operator | |
| Customer | | | |
| Order | | | |
| Product Ref | Yaw Pitot-S-## | | |
| SW version | V#.## | | |

| Sensor Readings | | |
|-----------------------------|------------------|-----------|
| | Reference | Reading |
| Front Differential Pressure | At 0.00 mbar | ... mbar |
| | At 35.00 mbar | ... mbar |
| | At 70.00 mbar | ... mbar |
| Yaw Differential Pressure | At - 70.00 mbar | ... mbar |
| | At - 35.00 mbar | ... mbar |
| | At 0.00 mbar | ... mbar |
| | At 35.00 mbar | ... mbar |
| Static Pressure | At 700.00 mbarA | ... mbarA |
| | At 1100.00 mbarA | ... mbarA |

| Connector | |
|--------------------------------------|---------------------------|
| Connector ref: AS4H06-05PN-HE | |
| Mating connector ref: ASL606-05SN-HE | |
| Pin | Function |
| 1 | Supply |
| 2 | 0V |
| 3 | CAN Low |
| 4 | CAN High |
| 5 | Reserved (do not connect) |

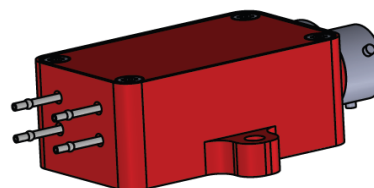

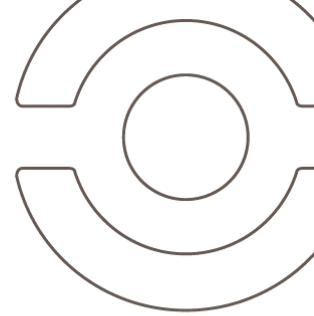



Technical features

| Board temperature | | |
|--|--------------------|----|
| Range | +5 to +105 | °C |
| Accuracy | ± 0.3 | °C |
| Resolution | 0.1 | °C |
| Sampling frequency | 10 | Hz |
| Output frequency | 10 | Hz |
| Electrical features | | |
| Supply Voltage (reverse polarity protection) | 6 to 25 | V |
| Typical Supply Current at 12V | 20 | mA |
| Mechanical features | | |
| Dimension | 59.7 x 37.5 x 16.1 | |
| Material | Aluminum | |
| Weight | 35 | g |
| Environment | | |
| Box protection | IP64 | |
| Vibration test | 20Gpp5' | |
| Shock | 500 | G |
| Operating Temp | +5 to +105 | °C |
| Storage Temp | -40 to +125 | °C |

| CAN parameters | | |
|--------------------------|---|-----|
| CAN type | 2.0A | - |
| Baudrate | 1M | bps |
| Frequency | 50 | Hz |
| Rx trig ID | 7F0 | Hex |
| Tx01 frame ID | 3F0 | Hex |
| Tx02 frame ID | 3F4 | Hex |
| Tx03 frame ID | 0x0000 (disabled) | Hex |
| CAN 120 Ω termination | <input type="checkbox"/> yes <input checked="" type="checkbox"/> no | - |
| Temperature Unit | <input checked="" type="checkbox"/> °C <input type="checkbox"/> °F | - |
| Enable Auto-Zero command | <input checked="" type="checkbox"/> yes <input type="checkbox"/> no | - |
| CAN bus features | | |
| CAN type | 2.0A or 2.0B | |
| Termination resistor | Software switchable 120Ω | |
| Baud rate | 250k to 1Mbps | |

Mechanical drawing

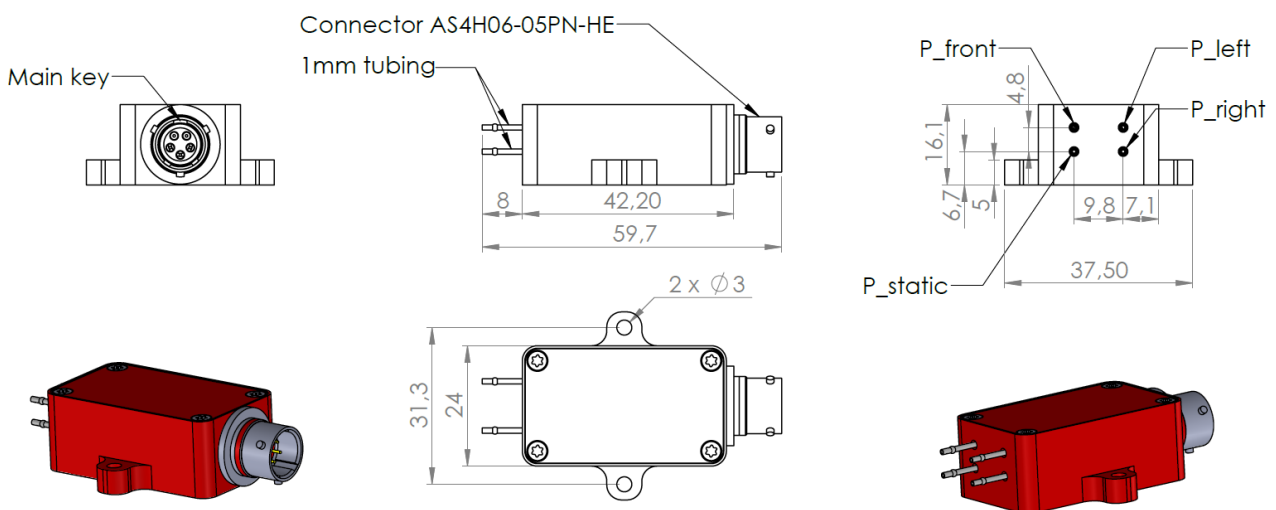

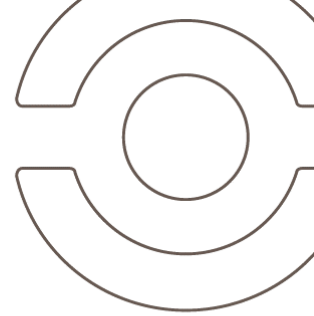

CAN data

Data output

Tx Frame #1 (1Hz to 200Hz output rate)

| ID | Byte 0 | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 | Byte 7 |
|------------------|---|--------------------|---|------------------|---|---------------|--|------------------------------|
| 0x03F0 (default) | Front Pressure MSB | Front Pressure LSB | Yaw Pressure MSB | Yaw Pressure LSB | Yaw Angle MSB | Yaw Angle LSB | Absolute static pressure MSB | Absolute static pressure LSB |
| | Front Differential Pressure 0.01 mbar/bit (signed integer 16bits) | | Yaw Differential Pressure 0.01 mbar/bit (signed integer 16bits) | | Estimated Yaw Angle (0.1 deg/bit) (signed integer 16bits) | | Absolute static pressure 600mbar + 0.01 mbar/bit (unsigned integer 16bits) | |

Tx Frame #2 (10Hz output rate)

| ID | Byte 0 | Byte 1 | Byte 2 | Byte 3 |
|------------------|----------|----------|--|-----------------------|
| 0x03F4 (default) | Not used | Not used | Board Temperature MSB | Board Temperature LSB |
| | Not used | | Board Temperature 0.1°C/bit or 0.1°F/bit (signed integer 16bits) | |

Tx Frame #3 (1Hz output rate, disabled by default)

| ID | Byte 0 | Byte 1 | Byte 2 | Byte 3 |
|---------------|----------------------------------|--------|--------|--------|
| Tx03 Frame ID | Unsigned int 32bits MSB first | | | |
| | Serial number | | | |

0x00: volatile autozero
0x01: non-volatile autozero

Auto-Zero command

Command input frame

| ID | Byte 0 | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 | Byte 7 |
|--------|--------|--------|--------|--------|--------|--------|--------------|--------|
| 0x07F1 | 0xFF | - | - | - | - | - | 0x00 or 0x01 | 0x01 |

Acknowledge output frame

| ID | Byte 0 | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 | Byte 7 |
|--------|--------|---------------|--------|--------|--------|--------|--------|--------|
| 0x07F3 | 0xFF | Serial Number | | | | 0x00 | 0x00 | 0x01 |

This command can be used to reset the 2 pressure sensors channels. This mechanism can be enabled or disabled (please refer to "Enable Auto-Zero command" of the CAN parameters tab). Each time the sensor will receive the above CAN frame, the autozero function will be launched (except during first second after power-on). When autozero function is launched, a "customer offset" is set up and added for each channel on top of factory calibration.

If Byte 6 value is 0x00:

Those "Customer offsets" will be stored in volatile memory. Therefore, they will be lost when switching OFF the sensor and they will be initialized to 0 when switching ON the sensor.

If Byte 6 value is 0x01:

Those "Customer offsets" will be stored in non-volatile memory. Therefore, they will be saved in memory when switching OFF the sensor.

Absolute pressure offset adjustment


Command input frame

| ID | Byte 0 | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 | Byte 7 |
|--------|---|--------|--------|--------|--------|--------|--------|--------|
| 0x07F1 | 0xFF | - | MSB | LSB | - | - | - | 0x02 |
| | Desired absolute static pressure 600mbar + 0.01mbar/bit (unsigned integer 16bits) | | | | | | | |

Acknowledge output frame

| ID | Byte 0 | Byte 1 | Byte 2 | Byte 3 | Byte 4 | Byte 5 | Byte 6 | Byte 7 |
|--------|--------|---------------|--------|--------|--------|--------|--------|--------|
| 0x07F3 | 0xFF | Serial Number | | | | 0x00 | 0x00 | 0x02 |

This command can be used to adjust the offset on absolute pressure static channel. This mechanism can be enabled or disabled (please refer to "Enable Auto-Zero command" of the CAN parameters tab). Each time the sensor will receive the above CAN frame, the offset adjustment function will be launched (except during first second after power-on). When offset adjustment function is launched, a "customer offset" is set up and added for each channel on top of factory calibration. This "Customer offset" will be stored in non-volatile memory. Therefore, they will be kept in memory when switching OFF the sensor.



Changing parameters

Must be setup according to Texense CAN protocol, or by using the tWist[®] software (texense Windows software tool) with the tSIB (texense Smart Interface Box).

| Address | Parameter | Raw values | values | Comments | |
|---------|--------------------------------------|---|--------------------------|----------------------------|-------------------|
| 0x00 | CAN type A or B (11 or 29bits ID) | 0x00 | CAN2.0A (standard) | default | |
| | | 0x10 | CAN2.0B (extended) | | |
| 0x01 | CAN baudrate | 0x00 | 1Mbps | default | |
| | | 0x01 | 500 Kbps | | |
| | | 0x02 | 250 Kbps | | |
| 0x02 | CAN output frequency | 0x00 | Rx frame trig | Request mode - 20Hz max. | |
| | | 0x01 | 1 Hz | | |
| | | 0x02 | 5 Hz | | |
| | | 0x03 | 10 Hz | | |
| | | 0x04 | 50 Hz | default | |
| | | 0x05 | 100 Hz | | |
| | | 0x06 | 200 Hz | | |
| 0x03 | Rx trig frame ID | if CAN2.0A: 0 to 0x7F0 | | MSB | Default 0x07F0 |
| 0x04 | | if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3) | | LSB | |
| 0x05 | Tx01 frame ID | if CAN2.0A: 0 to 0x7F0 | | MSB | Default 0x03F0 |
| 0x06 | | if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3) | | LSB | |
| 0x07 | Tx02 frame ID | if CAN2.0A: 0 to 0x7F0 | | MSB | Default 0x03F4 |
| 0x08 | | if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3) | | LSB | |
| 0x09 | CAN termination 120Ω resistor | 0 | Not connected | default | |
| | | 1 | Connected | | |
| 0x0A | Enable Auto-Zero command | 0 | Disable | | |
| | | 1 | Enable | default | |
| 0x0B | Temperature Unit | 0 | Fahrenheit (0.1°F / bit) | | |
| | | 1 | Celsius (0.1°C / bit) | default | |
| 0x0C | Tx03 frame ID | if CAN2.0A: 1 to 0x7F0 | | Default: 0x0000 (disabled) | |
| 0x0D | | if CAN2.0B: 1 to 0xFFFF (except 0x7F1 and 0x7F3) Frame disabled if 0x0000. | | | |

For complete information, contact us at info@texense.com

Ordering information

Ordering ref:

Yaw Pitot-S – *Range*

50: 50 mbar

76: 76mbar

ex: Yaw Pitot-S-76