

# A-CAN-DG-V4-2

16 channels analog to CAN converter for 0...5V signals

SN: D#####


Texense sensors are designed for data logging. Should the users want to include this sensor in a closed loop system, they must undertake total responsibility from doing so.

ANA inputs measurement		
Range	0 to 5.5	V
Accuracy	±1.5	mV
Resolution	0.1	mV
Sampling frequency	250	Hz
Analog filter cut-off frequency	125	Hz
Input impedance	10	kΩ
Internal temperature measurement		
Range	-40 to +125	°C
Uncertainty	±0.25	°C
CAN bus features		
CAN bus type	2.0 A or B	
Termination resistor	Software switchable 120Ω	
CAN baudrate	250k to 1M	bps
Output Frequency	Analog data	1Hz to 50Hz, or on request
	Internal temperature	1Hz
Electrical features		
Input supply voltage	6V to 30 V (see §Supply stage)	
Input supply current at 12V	≤ 30 mA internal ≤ 400mA with max load	
Output supply voltage	5V, 8.5V, 12V or Direct	
Max output supply current	45 mA per connector	
Mechanical features		
Dimension	23 x 26 x 85	mm
Material	Aluminium	
Weight	60	g
Environment		
Protection	IP65	
Vibration test	20Gpp5'	
Shock	500	G
Operating Temp	-40 to +125	°C
Storage Temp	-40 to +125	°C


Date		Operator	
Customer			
Order			
Product Ref	A-CAN-DG-V4-2-###		
SW version	V###		

Channel	Sensor readings	
	@500mV	@4500mV
#1	...mV	...mV
#2	...mV	...mV
#3	...mV	...mV
#4	...mV	...mV
#5	...mV	...mV
#6	...mV	...mV
#7	...mV	...mV
#8	...mV	...mV
#9	...mV	...mV
#10	...mV	...mV
#11	...mV	...mV
#12	...mV	...mV
#13	...mV	...mV
#14	...mV	...mV
#15	...mV	...mV
#16	...mV	...mV

CAN bus parameters			
CAN type	2.0A	<del>2.0B</del>	-
Baudrate	1M		bps
Frequency	10		Hz
Rx trig frame ID	0x7F0		Hex
Tx01 frame ID	0x3F0		Hex
Tx02 frame ID	0x3F4		Hex
Tx03 frame ID	0x3F8		Hex
Tx04 frame ID	0x3FC		Hex
Tx05 frame ID	0x400		Hex
CAN 120 Ω termination	<input type="checkbox"/> enable	<input checked="" type="checkbox"/> disable	-

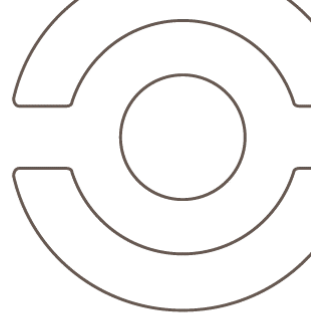


## Pinout

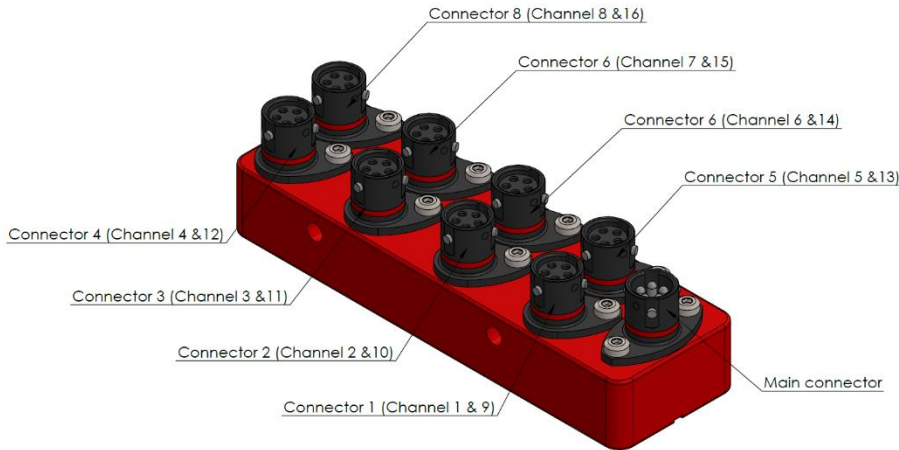


8x Channel connectors (#1 to #8)	
Connector ref: 8STA0-0205SN Mating connector ref: 8STA6-0205PN	
Pin	Function
1	Supply output
2	GND
3	ANA <sup>n</sup>
4	ANA <sup>n+8</sup>
5	NC

Main connector	
Connector ref: 8STA0-0205PN Mating connector ref: 8STA6-0205SN	
Pin	Function
1	Supply
2	0V
3	CAN Low
4	CAN High
5	Reserved (do not connect)


## Mechanical drawing

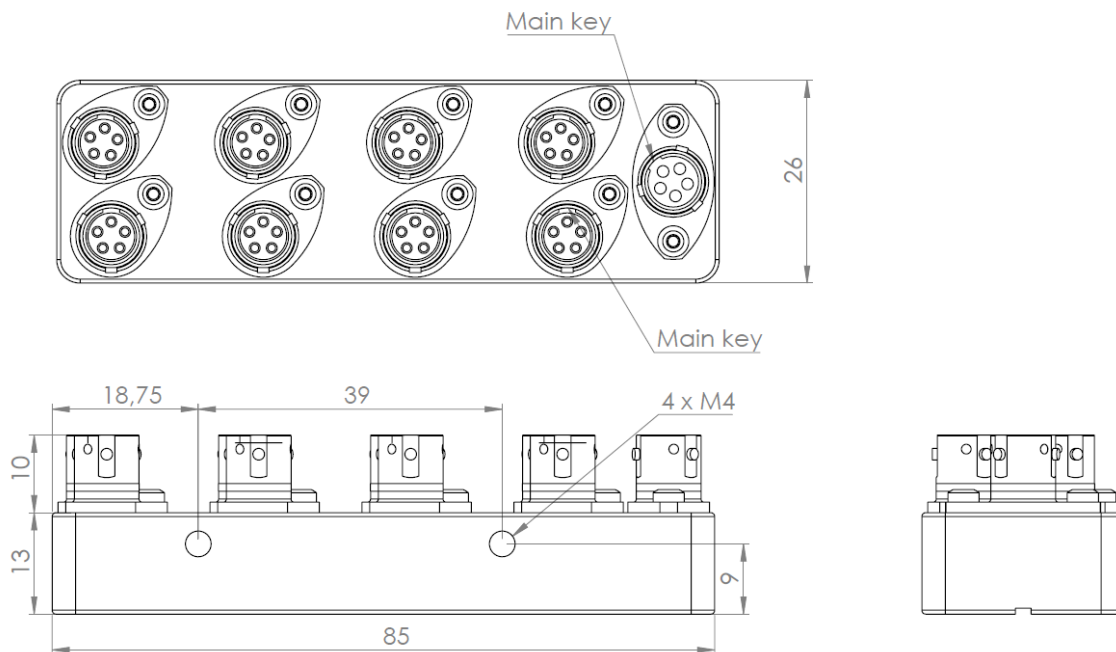

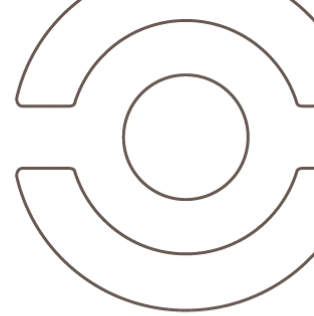

## Wiring

Example for connector #1:

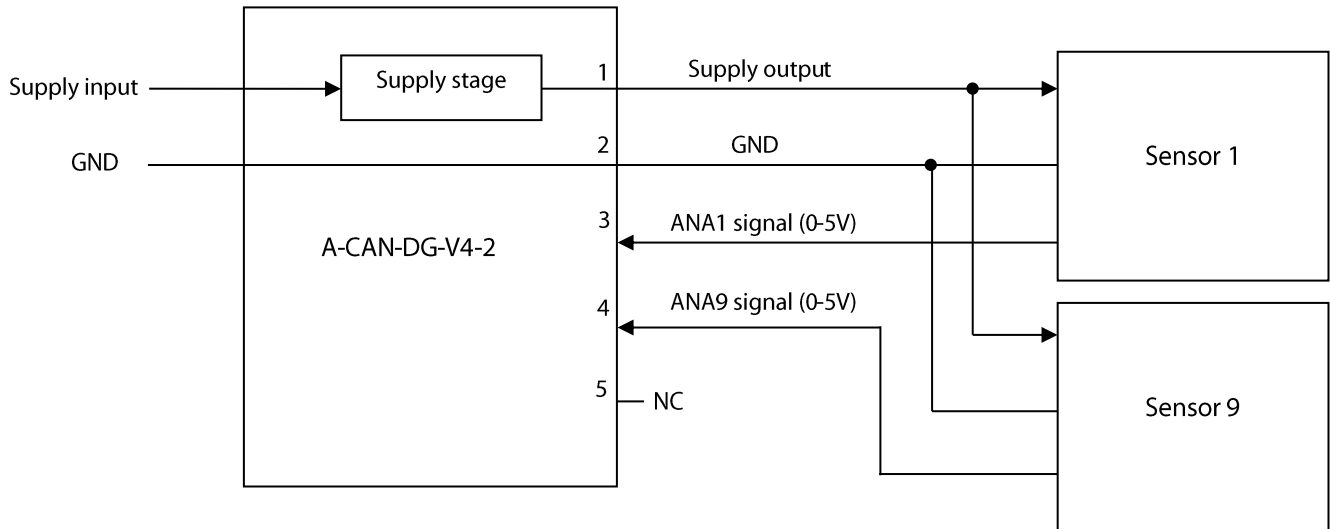


### Note:

- Sensors have to be compatible with supply voltage and supply current (see \$Supply stage).
- All signals must be isolated from any other conductive part with at least 100MΩ under 50V.

## Supply stage

Multiple supply stage configurations are available when ordering:

Ordering code	Output supply voltage	Input supply voltage	Output current
5V	Regulated 5V	7V to 30V	30mA per channel
8.5V	Regulated 8.5V	10.5V to 30V	
12V	Regulated 12V	14V to 30V	
Direct	= Input supply voltage (not regulated)	6V to 30V	45mA per channel



## CAN data

### Data output

#### TX Frame #01 (1 to 250Hz output rate)

ID	Byte 0	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
0x03F0 (default)	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
	Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits	
	Channel 1 voltage		Channel 2 voltage		Channel 3 voltage		Channel 4 voltage	
	0.1mV/bit		0.1mV/bit		0.1mV/bit		0.1mV/bit	

#### TX Frame #02 (1 to 250Hz output rate)

ID	Byte 0	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
0x03F4 (default)	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
	Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits	
	Channel 5 voltage		Channel 6 voltage		Channel 7 voltage		Channel 8 voltage	
	0.1mV/bit		0.1mV/bit		0.1mV/bit		0.1mV/bit	

#### TX Frame #03 (1 to 250Hz output rate)


ID	Byte 0	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
0x03F8 (default)	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
	Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits	
	Channel 9 voltage		Channel 10 voltage		Channel 11 voltage		Channel 12 voltage	
	0.1mV/bit		0.1mV/bit		0.1mV/bit		0.1mV/bit	

#### TX Frame #04 (1 to 250Hz output rate)

ID	Byte 0	Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
0x03FC (default)	MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
	Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits		Unsigned integer 16bits	
	Channel 13 voltage		Channel 14 voltage		Channel 15 voltage		Channel 16 voltage	
	0.1mV/bit		0.1mV/bit		0.1mV/bit		0.1mV/bit	

#### TX Frame #05 (1Hz output rate)

ID	Byte 0	Byte 1
0x0400 (default)	MSB	LSB
	Signed integer 16bits	
	Internal temperature	
	0.1°C/bit	



## Changing parameters

Must be setup according to Texense CAN protocol, or by using the tWist<sup>®</sup> software (texense Windows software tool) with the tSIB (texense Smart Interface Box).

Address	Parameter	Raw values	Values	Comments
0x00	CAN type A or B (11 or 29bits ID)	0x00	CAN2.0 <b>A</b> (standard)	default
		0x10	CAN2.0 <b>B</b> (extended)	
0x01	CAN baudrate	0x00	1Mbps	default
		0x01	500 Kbps	
		0x02	250 Kbps	
0x02	CAN output frequency	0x00	Rx frame trig	Request mode - 20Hz max.
		0x01	1 Hz	
		0x02	5 Hz	
		0x03	10 Hz	default
		0x04	50 Hz	
		0x05	125 Hz	
		0x06	250 Hz	
0x03	Rx trig frame ID	if CAN2.0A: 0 to 0x7F0		MSB
0x04		if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3)		LSB
				Default 0x07F0
0x05	Tx01 frame ID	if CAN2.0A: 0 to 0x7F0		MSB
0x06		if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3)		LSB
				Default 0x03F0
0x07	Tx02 frame ID	if CAN2.0A: 0 to 0x7F0		MSB
0x08		if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3)		LSB
				Default 0x03F4
0x09	Tx03 frame ID	if CAN2.0A: 0 to 0x7F0		MSB
0x0A		if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3)		LSB
				Default 0x03F8
0x0B	Tx04 frame ID	if CAN2.0A: 0 to 0x7F0		MSB
0x0C		if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3)		LSB
				Default 0x03FC
0x0D	Tx05 frame ID	if CAN2.0A: 0 to 0x7F0		MSB
0x0E		if CAN2.0B: 0 to 0xFFFF (except 0x7F1 and 0x7F3)		LSB
				Default 0x0400
0x0F	CAN termination 120Ω resistor	0	Not connected	default
		1	Connected	

For complete information, contact us at [info@texense.com](mailto:info@texense.com)

## Ordering information

### Ordering ref:

A-CAN-DG-V4-2-Supply

5V

8.5V

12V

Direct

Ex: A-CAN-DG-V4-2-8.5V